

XENON™ ULTRA 1960 & 1962

Handheld Barcode Scanners

Accessories Guide

Honeywell

TABLE OF CONTENTS

- 3 Power options
- 3 Access points, charge and communication bases
- 4 Power supplies
- 5 Cables
- 6 Stands

POWER OPTIONS



Lithium-ion Battery

Smart battery: Lithium-ion battery for Xenon™ Ultra 1962 Bluetooth® scanners.



Lithium-Ion Battery – Contactless

Smart battery: Lithium-ion battery for Xenon Ultra 1962 contactless Bluetooth scanners.



Battery-Free Supercapacitor

Battery-free super capacitor for Xenon Ultra 1962 battery-free Bluetooth scanners.



Battery-Free Supercapacitor – Contactless

Battery-free Super capacitor for Xenon Ultra 1962 battery-free contactless Bluetooth scanners.

ACCESS POINTS, CHARGE AND COMMUNICATION BASES



Bluetooth Access Point

Access point for scanners. Class 2 Bluetooth, 10m (33'), RS232/USB/KBW/IBM (cable sold separately).



Bluetooth Access Point – Healthcare

Access point for scanners. Class 2 Bluetooth, 10m (33'), RS232/USB/KBW/IBM (cable sold separately).



Xenon Ultra Charge and Communication Vertical Base Kit – Healthcare

Presentation charge and communication base, Class 1100M / Class 2 10M Bluetooth, 7 scanners can be connected, RS232/USB/KBW host interfaces (cables sold separately), white, disinfectant ready anti-microbial housing.

Enable Charge only mode: **BASLNKO**.



Xenon Ultra Charge and Communication Vertical Base Kit – General Purpose

Presentation charge and communication base, Class 1100M / Class 2 10M Bluetooth, 7 scanners can be connected, RS232/USB/KBW host interfaces (cables sold separately), black, disinfectant ready housing.

Enable Charge only mode: **BASLNKO**.



General Purpose (Black)
Battery Cup

Contactless Cup

Healthcare (White)
Battery Cup

Contactless Cup

Xenon™ Ultra Charge and Communication Presentation Cup Only

1962 Charge and Communication Cup for use with universal presentation base.



General Purpose (Black)

Healthcare (White)

Xenon Ultra Charge and Communication Presentation Universal Base Only

1962 Charge and Communication universal base for use charging cup of presentation CCB.



Xenon Ultra Charge and Communication Horizontal Presentation Base – Healthcare

Desktop/Wall mount charge and communication base, class 1100M/class 2 10M Bluetooth®, white, disinfectant ready anti-microbial housing.



Xenon Ultra Charge and Communication Horizontal Presentation Base – General Purpose

Desktop/Wall mount charge and communication base, class 1100M/class 2 10M Bluetooth®, black, disinfectant ready housing.

POWER SUPPLIES

For Xenon Ultra 1960 Corded Scanner ONLY



Power Supply – NA Plug

Power Supply: NA plug, 1.0A @ 5.2V DC, 90-255V AC @ 50-60Hz.



Power Supply – EU Plug

Power Supply: EU plug, 1.0A @ 5.2V DC, 90-255V AC @ 50-60Hz.



Power Supply – AU Plug

Power Supply: AU plug, 1.0A @ 5.2V DC, 90-255V AC @ 50-60Hz.



Power Supply – CN Plug

Power Supply: CN plug, 1.0A @ 5.2V DC, 90-255V AC @ 50-60Hz.

For Xenon Ultra 1962 Cordless Scanner ONLY



Power Supply – NA Plug

Power Supply: NA plug, 3.0A @ 5V DC, 100-240V AC @ 50-60Hz.



Power Supply – EU Plug

Power Supply: EU plug, 3.0A @ 5V DC, 100-240V AC @ 50-60Hz.



Power Supply – AU Plug


Power Supply: AU plug, 3.0A @ 5V DC, 100-240V AC @ 50-60Hz.



Power Supply – CN Plug

Power Supply: CN plug, 3.0A @ 5V DC, 100-240V AC @ 50-60Hz.

Power supplies for cabled connections

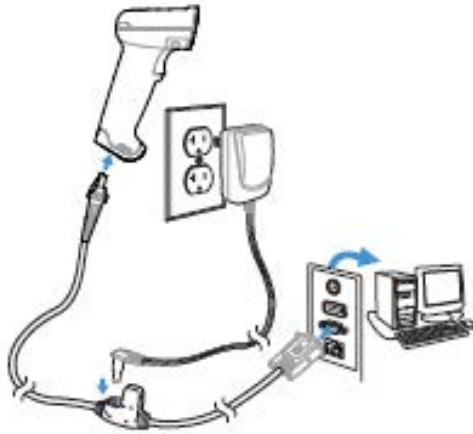

Power supplies for charge/communication bases

Presentation CCB



Horizontal CCB



CABLES

RS-232 Power Cable

Cable: RS232(5V signals), black, DB9 Female, 3m (9.8'), coiled, 5V external power with option for host power on pin 9, w/o ferrite.

*1960 Corded Only.

RS-232 Power Cable

Cable: RS-232C (+/-12V signals), black, DB9 Female, 3 m (9.8 ft), coiled, 5V external power with option for host power on pin 9.

*1960 Corded Only.

RS-232 Power Cable

Cable: RS-232 (+5V signals), black, DB9 Male, 3 m (9.8ft), coiled, external power with option for host power on pin 9 for connection to Wincor Beetle™.

*1960 Corded Only.

RS-232 Power Cable

Cable: RS-232 (5V signals), Honeywell Bioptic Stratos™ Aux, black, 10 pin modular, 3m (9.8 ft), coiled, host power possible (dependent upon scanner and Stratos models).

*1960 Corded Only.

RS-232 Power Cable

Cable: RS-232 (5V signals), Magellan™ Aux Port, black, 10 pin modular, 3 m (9.8 ft), straight, external power with option for host scanner power.

*1960 Corded Only.

USB Power Cable

Cable: USB, black, Type A, 5m (16.4'), coiled, 5V host power, w/o ferrite.

USB Power Cable

Cable: USB, black, Type A, 5m (16.4'), straight, 5V host power, w/o ferrite.

USB Power Cable

Cable: USB, black, Type A, 4m (13.1'), coiled, 5V host power, w/o ferrite.

USB Power Cable

Cable: USB, black Type A, 1.5m (5'), straight, 5V host power, w/o ferrite.

USB Power Cable

Cable: USB, black, Type A, 3m (9.8ft), coiled, 5V host power.

USB Power Cable

Cable: USB, black, Type A, 3 m (9.8'), straight, 5V host power.

*Cable shipped with Xenon Ultra 1960 kit SKUs.

USB Power Cable

Cable: USB, Type A, 2.7M (8.8'), straight, 5V host power.

*Cable shipped with Xenon Ultra 1962 Kit SKUs.

Keyboard Wedge Power Cable

Cable: KBW, black, PS2, 3m (9.8'), coiled, 5V external power with options for host power, w/o ferrite.

*1960 Corded Only.

USB Power Cable, Type C

Cable: USB Type C, black, 3m (9.8'), coiled, 5V host power, w/o ferrite.

USB Power Cable, High Speed

Cable: USB, Type A, black, 1.2m (3.9'), 5V host power, w/o ferrite.

Keyboard Wedge Power Cable

Cable: KBW, black, PS2, 3 m (9.8 ft), coiled, 5V external power with option for host power.

*1962 Cordless only.

RS-232 Power Cable

Cable: RS-232 (5V signals), black, DB9 Female, 3 m (9.8 ft), coiled, 5V external power with option for host power on pin 9.

*1962 Cordless only.

STANDS



Xenon™ Ultra 1960 Stand – Flexible Presentation Stand

Stand: gray, 22cm (9 in) height, flexible rod, large oval weighted base, Xenon Ultra 1960 cup.



Xenon XP 1950 Stand – Flexible Presentation Stand

Stand: gray, 22 cm (9 in) height, flexible rod, large oval weighted base, Xenon 1900/1950 cup.

Use **PAPTPR** to configure your Xenon Ultra 1960 to utilize this legacy stand for presentation mode scanning.

For more information

sps.honeywell.com

Honeywell Safety and Productivity Solutions

855 S Mint Street,
Charlotte, NC 28202

800-582-4263

www.honeywell.com

Xenon and Stratos are trademarks or registered trademarks of Honeywell International Inc.

Bluetooth is a trademark or registered trademark of Bluetooth SIG, Inc.

Magellan is a trademark or registered trademark of Datalogic S.p.A.

All other trademarks are the property of their respective owners.

Xenon Ultra 1960 & 1962 Accessories Guide | A4 | Rev B | 06/23
© 2023 Honeywell International Inc.

Honeywell